


Onity presents **solution** TE1 Glass, a range of silent glass door minibars backed up by a leading company in solutions for the hospitality market.

- ❑ **Thermoelectric** (Peltier) cooling technology, which helps obtain significant energy savings
- ❑ **Ecological**: they comply with high quality standards and the latest environmental regulations
- ❑ **Silent**: Their cooling system, without a motor or moving parts, enables a very silent operation especially suited to hotel environments (A class)
- ❑ Accurate and stable **temperature control**
- ❑ **Flexibility**: The door is reversible thanks to its changeable hinges, in a quick and easy way
- ❑ **Options** available to personalise the product to meet different customers' needs

IMPORTANT: Ventilation

The cooling unit requires ventilation space for an optimal running of the minibar, therefore it is recommended to leave a minimum space of **6 cm** around it.

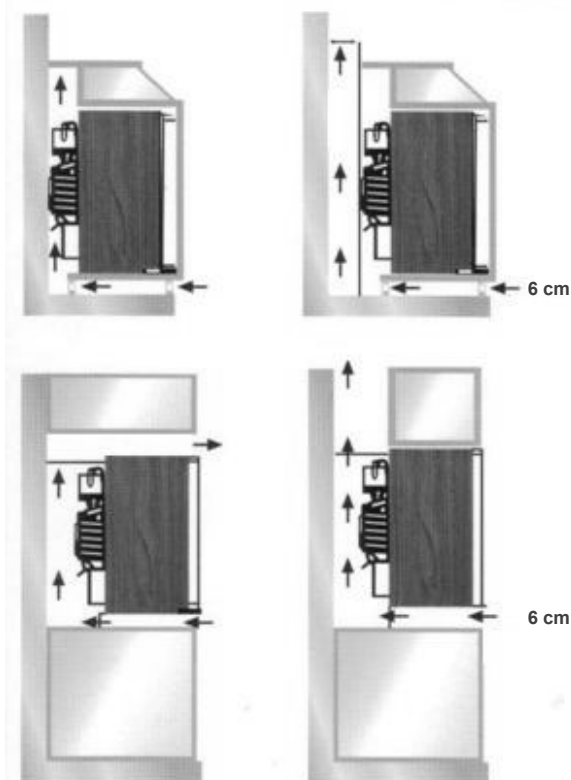

Certifications

- ❑ 2014/30/EU (EMC)
- ❑ 2014/35/EU (LV)
- ❑ EU/2019/2019 (Energy)
- ❑ 2011/65/EU (RoHS)



* 40 L
image on p2



Technical Specifications

	27 L	30 L	40 L
Model	Solution TE1 27-G	Solution TE1 30-G	Solution TE1 40-G
Net volume	24 Litres	31 Litres	40 Litres
Dimensions with packing (mm, H x W x D)	559 x 432 x 464	559 x 432 x 464	614 x 464 x 494
Dimensions unpacked (mm, H x W x D)	512 x 384 x 399	512 x 420 x 397	566 x 441 x 432
Nominal power	60 Watt		
Power supply	100-240 V / 50-60 Hz		
Net weight	11.6 Kg (±1)	11.3 Kg (±1)	13.5 Kg (±1)
Gross weight	12.6 Kg (±1)	12.5 Kg (±1)	15 Kg (±1)
Thermostat type	ICS (Intelligent Control System)		
Temperature range	8-14 °C		
External temp. interval	16 to 32 °C		
Defrost type	Auto-defrost		
Defrost interval	23.9 h, at 25 °C		
Interior light	LED type		
Shelves	x2 transparent (plastic)		
1,5L Bottle holder	n/a		
Door slider for cabinet	n/a		
Other options	Lock		
Annual energy consumption	175 kWh /a	191 kWh /a	162 kWh /a
Energy Efficiency Class	G		
Climate class	N		
Airborne acoustical noise emissions	23 dB(A) re 1 pW	23 dB(A) re 1 pW	23 dB(A) re 1 pW
Airborne acoustical noise emission class	A		

27 L



30 L



40 L

